





Have it all in one refrigerated fixture! This case has multiple merchandising areas, selfwatering vases for cut flowers and a stepped display area for rose buckets, arrangements and bouquets.


Capacity: 49 watering vases, plus a stepped area for arrangements.


Features:

| Self-watering - Automatic drain and fill cycle |
|--|
| using our proprietary electronics. |
| Automatic water level sensor - always have |
| vases full of fresh water. |
| •Soft Air Flow Environment - evenly distributed |
| floral envelop, sealed with our air curtain to |
| simulate a closed door case. |
| Consistent 36° F. air temperature. |
| •High Humidity - 65% to 80%. |
| 15° forward lean, locking vase collars - ensures |
| your bouquets are displayed properly. |
| Polyurethane foamed in place insulation. |
| •Your choice of laminate and trim packages to |
| match any color palette. |

Floraline Display Products Corporation - www.floraline.com 38160 Western Parkway Willoughby, Ohio 44904 Phone: (440) 975-9449 or 800-239-3722 Fax: (440) 918-9043

Disclaimer Notice: Product specifications, drawings, materials, construction methods, pricing and availability subject to change without notice.

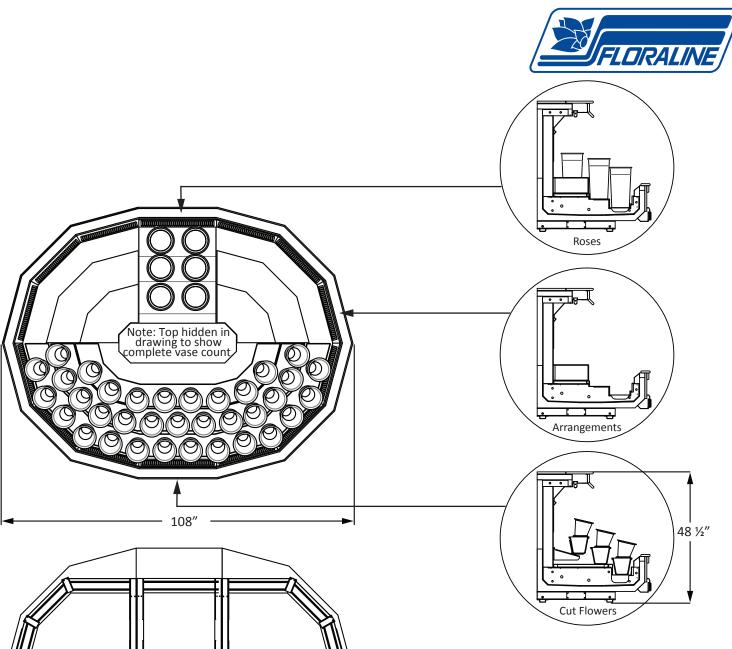

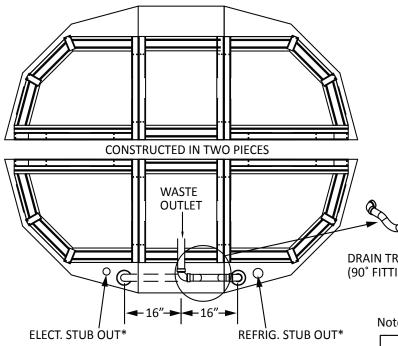

Floraline Display Products Corporation - www.floraline.com

38160 Western Parkway Willoughby, Ohio 44904 Phone: (440) 975-9449 or 800-239-3722 Fax: (440) 918-9043

Disclaimer Notice: Product specifications, drawings, materials, construction methods, pricing and availability subject to change without notice.

DRAIN TRAP- SUPPLIED LOOSE (90° FITTING TO FLOOR DRAIN NOT INCLUDED)

Note:* shown in standard location, alternate locations available

| LED LIGHTS | 1.0 AMP | | MPI | -9' (2pc) |
|------------------------------|-----------------------------------|------|-----|-----------|
| | 2.6 AMP | 115V | 1PH | 60Hz |
| H ₂ O Transformer | 3.0 AMP Max | | | |
| Defrost Cycle | 2 times daily for 30 minutes each | | | |
| BTUs@+25°F | +25°F 14,640 R-404A STAND | | | |
| | • | | | |